

CUTTING TOOLS

FULLCUT MILL FCR	P113
FULLCUT MILL FCM	P119
FULLCUT MILL FCM for Arbor Type	P127
C-CUTTER MINI	P129
C-CUTTER	P134
CENTER BOY	P135
Application example	P136




Ultra High Feed Chamfer Mill


C-CUTTER mini

Front & back chamfering

Multi insert type

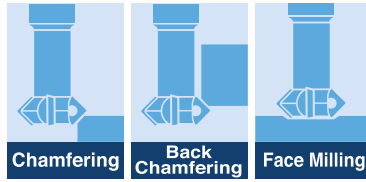

World's smallest
Hexagon insert

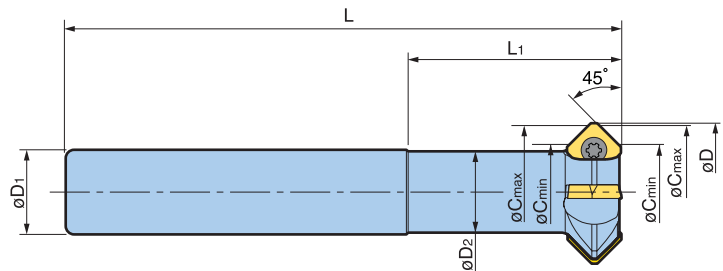


● in the table indicates Long Type

Chamfer		Model	øD	øD1	øD2	L	L1	Insert Model	No. of Insert	Insert Clamping Screw Set
øCmin	øCmax									
10	12	ST12-C1012-45B-20	12.7	12	9.0	93	20	CM04 ...	3	S2SS-T6
		-35 ●				108	35			
11	16	ST12-C1116-45B-25	17.1	12	9.6	98	25	CM05 ...	4	S2TS-T6
		-40 ●				113	40			
15	20	ST16-C1520-45B-50	20.7	16	13.2	123	50	CM10 ...	4	S4S-T15
19	24	ST20-C1924-45B-60	24.7	20	17.2	143	60			
22	32	ST20-C2232-45B-50	32.7	20	19.2	130	50	CM10 ...	4	S4S-T15
		-80 ●				160	80			
32	42	ST32-C3242-45B-65	42.7	32	30.6	175	65	CM10 ...	4	S4S-T15
		-100 ●				211	100			

1. Wrench and screw are included. Inserts are ordered separately (10/pkg).
2. 10 screws and 1 wrench are included in Insert Clamping Screw Set.
3. In case of chamfering with 4 insert type, chatter may occur due to increasing cutting force when plunge cutting. Please try the different types with less inserts, 1 or 2.




Refer to the Cutting Condition on page 130

Detailed dimension

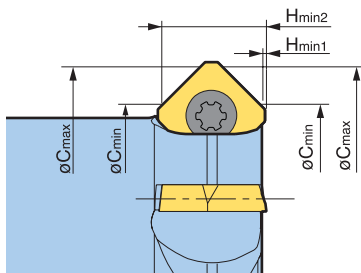

Cutter type	øCmin	øCmax	Hmin1	Hmin2
C1012	10	12	1.0	3.7
C1116	11	16	0.4	6.2
C1520	15	20	0.6	6.3
C1924	19	24	0.6	6.3
C2232	22	32	0.4	12.4
C3242	32	42	0.4	12.4


Indexable Inserts

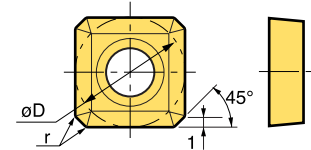

The suffix **SE** designates a sharp cutting edge version.

Fig.	Insert Model	øD	Nose Red. r	P	M	K	N
				ACP300	ACP200	DS20	
1	CM0402	3.97	0.2	○	—	—	—
2	CM0502	5	0.2	—	○	○	—
	CM0502SE			—	○	—	—
3	CM10C1	10	C1	—	○	○	—
	CM10C1SE			—	○	—	—

1. Inserts are available in packet of 10pcs. Please specify model number and grade. (ie: CM0502-ACP200)
2. It is recommended to regularly replace clamping screws and wrench to ensure the correct clamping force is maintained.



New release, sharp cutting edge insert!! NEW

Sharp cutting edge minimises the generation of burrs. This is especially beneficial when cutting stainless and mild steel materials.

Anti-seizure Lubricant



5g contained

Model **BN-5**

Recommended cutting condition

Work Material	Insert Size	Insert Grade	Side Cutting		Plunge Cutting		Face Milling (CM10 insert only)	
			Vc (m/min)	f (mm/tooth)	Vc (m/min)	f (mm/tooth)	Vc (m/min)	f (mm/tooth)
General steel Alloy steel	CM04	ACP300	100 - 300	0.05 - 0.15	100 - 200	0.06 - 0.12	—	—
	CM05	ACP200	100 - 350	0.08 - 0.18	100 - 200	0.06 - 0.12	—	—
	CM10		100 - 350	0.08 - 0.25	100 - 220	0.08 - 0.18	100 - 200	0.1 - 0.2
High-alloy steel	CM04	ACP300	100 - 180	0.05 - 0.15	100 - 180	0.05 - 0.12	—	—
	CM05	ACP200	100 - 200	0.08 - 0.18	100 - 200	0.06 - 0.12	—	—
	CM10		100 - 220	0.08 - 0.22	100 - 250	0.06 - 0.16	100 - 220	0.08 - 0.2
Prehardened steel (Less than HRC40)	CM04	ACP300	50 - 80	0.05 - 0.08	50 - 80	0.04 - 0.10	—	—
	CM05	ACP200	60 - 100	0.06 - 0.10	60 - 100	0.04 - 0.12	—	—
	CM10		60 - 120	0.06 - 0.10	60 - 120	0.04 - 0.15	60 - 100	0.05 - 0.1
Stainless steel	CM04	ACP300	60 - 150	0.05 - 0.18	60 - 150	0.03 - 0.10	—	—
	CM05	ACP200	100 - 200	0.08 - 0.20	80 - 200	0.05 - 0.12	—	—
	CM10	SE	100 - 250	0.08 - 0.30	80 - 220	0.06 - 0.16	80 - 150	0.05 - 0.2
Cast iron	CM04	ACP300	80 - 150	0.05 - 0.20	80 - 150	0.06 - 0.12	—	—
	CM05	ACP200	100 - 200	0.08 - 0.30	100 - 200	0.08 - 0.15	—	—
	CM10		100 - 300	0.08 - 0.40	100 - 300	0.08 - 0.20	100 - 180	0.1 - 0.25
Aluminum	CM04	ACP300	100 - 800	0.05 - 0.20	100 - 600	0.05 - 0.20	—	—
	CM05	DS20	150 - 800	0.08 - 0.30	100 - 800	0.08 - 0.25	—	—
	CM10		200-1,000	0.08 - 0.45	200 -1,000	0.08 - 0.30	100 -1,000	0.05 - 0.3

1. The table is just a reference to determine cutting conditions. It should be adjusted according to the condition of the machine tool and workpiece.
2. Wet cutting is recommended to obtain the good surface quality.
3. In case built-up edge occurs cutting aluminum and stainless steel, use soluble oil.
4. Standard length type (w/o ● models) are recommended for stainless and pre-hardened steel.


Ultra High Feed Chamfer Mill

C-CUTTER mini

Front & back chamfering

Bolt hole & starting hole for tapping type

Tap size : M8 - M20

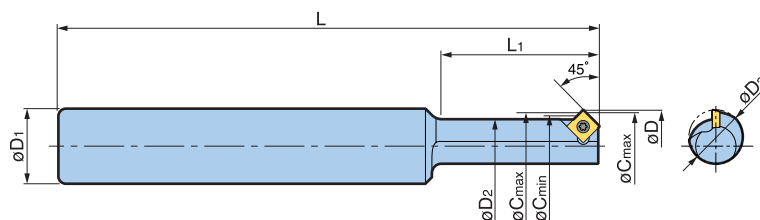

● in the table indicates Long Type

Chamfer		Model	øD	øD1	øD2	L	L1	Insert Model	Insert Clamping Screw Set
øCmin	øCmax								
6.6	8.4	ST10-CM08-45B-19	9.2	10	6.3	81	19	CM04...	S2SS-T6
		-35●							
8.3	10.5	ST12-CM10-45B-25	11.3	12	8.0	99	25	CM05...	S2TS-T6
		-45●							
		ST12-CM12-45B-29							
10.0	12.6	ST12-CM12-45B-29	13.4	12	9.7	102	29	CM05...	S2TS-T6
		-53●							
11.8	14.7	ST16-CM14-45B-33	15.5	16	11.5	107	33	CM05...	S2TS-T6
		-61●							
13.8	16.8	ST16-CM16-45B-37	17.6	16	13.5	110	37	CM05...	S2TS-T6
		-69●							
15.2	18.9	ST20-CM18-45B-42	19.7	20	14.9	126	42	CM05...	S2TS-T6
		-78●							
17.2	21.0	ST20-CM20-45B-46	21.8	20	16.9	129	46	CM05...	S2TS-T6
		-86●							


1. Wrench and screw are included. Inserts are ordered separately (10/pkg).
2. 10 screws and 1 wrench are included in Insert Clamping Screw Set.
3. For ● Long Type, standard insert is recommended rather than "SE" sharp edge insert to avoid chipping.

Refer to the Cutting Condition on page 132


Detailed dimension

Cutter Type	øCmin1	øCmin2	øCmax	Hmin1	Hmin2	Offset F
CM08	6.4	6.6	8.4	1.0	3.7	1.45
CM10	5.5	8.3	10.5	0.5	5.0	1.65
CM12	7.6	10.0	12.6	0.5	5.2	1.85
CM14	9.7	11.8	14.7	0.5	5.3	2.00
CM16	11.8	13.8	16.8	0.5	5.4	2.05
CM18	13.9	15.2	18.9	0.5	5.7	2.40
CM20	16.0	17.2	21.0	0.5	5.8	2.45

< Tap starting hole >

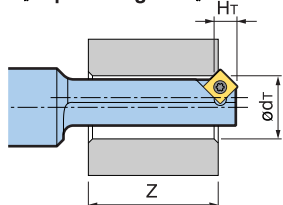

< Bolt hole >

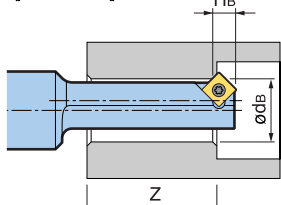

Cutter Type	Tap starting hole		Bolt hole		Z	
	øDr	HT	øDb	HB	Standard type	Long type
CM08	6.8(M8)	3.6	6.6 (M6)	3.7	13	29
CM10	8.5(M10)	4.9	9 (M8)	4.6	17	37
CM12	10.3(M12)	5.0	11 (M10)	4.7	21	45
CM14	12.0(M14)	5.2	-	-	25	53
CM16	14.0(M16)	5.3	14 (M12)	5.3	29	61
CM18	15.5(M18)	5.6	16 (M14)	5.3	33	69
CM20	17.5(M20)	5.6	18 (M16)	5.4	37	77

Indexable Inserts


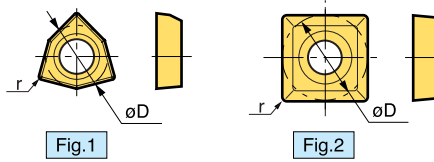


Fig.	Insert Model	øD	Nose Red. r	P	M	K	N
				ACP300	ACP200	DS20	
1	CM0402	3.97	0.2	○	-	-	-
2	CM0502	5	0.2	-	○	○	○

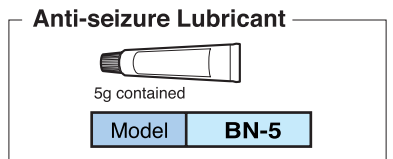

1. Inserts are available in packet of 10pcs. Please specify model number and grade. (ie: CM0502-ACP200)
2. It is recommended to regularly replace clamping screws and wrench to ensure the correct clamping force is maintained.

Recommended cutting condition

Work Material	Cutter Type	Insert Grade	Standard Type		● Long Type		
			Vc (m/min)	f (mm/rev)	Vc (m/min)	f (mm/rev)	
General steel Alloy steel	CM08	ACP300	80 - 180	0.03 - 0.10	30 - 80	0.03 - 0.08	
	CM10, CM12	ACP200	120 - 200	0.04 - 0.12	30 - 100	0.04 - 0.1	
	CM14, CM16		120 - 200	0.04 - 0.15	30 - 100	0.04 - 0.1	
	CM18, CM20		120 - 250	0.05 - 0.20	40 - 100	0.05 - 0.12	
High-alloy steel	CM08	ACP300	80 - 160	0.03 - 0.08	20 - 80	0.03 - 0.08	
	CM10, CM12	ACP200	100 - 180	0.04 - 0.10	30 - 100	0.04 - 0.1	
	CM14, CM16		100 - 200	0.04 - 0.10	30 - 100	0.04 - 0.1	
	CM18, CM20		100 - 220	0.05 - 0.12	40 - 100	0.05 - 0.12	
Prehardened steel (Less than HRC40)	CM08	ACP300	40 - 80	0.03 - 0.08	20 - 80	0.03 - 0.08	
	CM10, CM12	ACP200	40 - 80	0.04 - 0.10	30 - 80	0.04 - 0.1	
	CM14, CM16		40 - 80	0.04 - 0.10	30 - 80	0.04 - 0.1	
Stainless steel	CM18, CM20	ACP200	40 - 100	0.05 - 0.12	40 - 100	0.05 - 0.12	
	CM08		ACP300	60 - 120	0.03 - 0.08	20 - 80	0.03 - 0.08
	CM10, CM12		ACP200	60 - 120	0.04 - 0.10	30 - 100	0.04 - 0.1
	CM14, CM16			60 - 150	0.04 - 0.10	30 - 100	0.04 - 0.1
Cast iron	CM18, CM20	ACP200	60 - 150	0.05 - 0.12	40 - 100	0.05 - 0.1	
	CM08		ACP300	80 - 150	0.03 - 0.08	20 - 100	0.03 - 0.08
	CM10, CM12		ACP200	100 - 180	0.04 - 0.10	30 - 100	0.04 - 0.12
	CM14, CM16			100 - 200	0.04 - 0.10	30 - 120	0.04 - 0.12
Aluminum	CM18, CM20	ACP200	100 - 250	0.05 - 0.12	50 - 150	0.05 - 0.15	
	CM08		ACP300	100 - 500	0.03 - 0.08	20 - 100	0.03 - 0.08
	CM10, CM12		DS20	100 - 600	0.04 - 0.10	30 - 120	0.04 - 0.1
	CM14, CM16			100 - 800	0.04 - 0.15	30 - 120	0.04 - 0.1
CM18, CM20	ACP200	100 - 800	0.05 - 0.20	40 - 150	0.05 - 0.12		

Vc: Cutting speed (m/min.) f: Feed per revolution (mm/rev.)

1. The table is just a reference to determine cutting conditions. It should be adjusted according to the condition of the machine tool and workpiece.
2. Wet cutting is recommended to obtain the good surface quality.
3. In case built-up edge occurs cutting aluminum and stainless steel, use soluble oil.
4. Standard length type (w/o ● models) are recommended for stainless and pre-hardened steel.


Ultra High Feed Chamfer Mill

C-CUTTER mini

Front chamfering



Chamfering

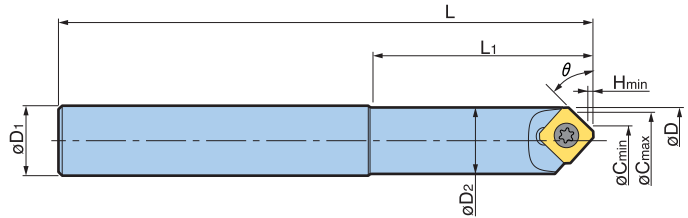

● in the table indicates Long Type

Chamfer		Chamfering angle θ	Model	ϕD	ϕD_1	ϕD_2	L	L ₁	H _{min}	Insert Model	Insert Clamping Screw Set
ϕC_{min}	ϕC_{max}										
2	7	45°	ST10-C0207-45-20	8.1	10	7.8	81	20	0.4	CM05...	S2TS-T6
			-35 ●				96	35			
5	15	45°	ST16-C0515-45-50	15.8	16	15.2	122	50	0.4	CM10...	S4S-T15
2	14	30°	ST16-C0214-30-40	15.9	16	15.4	105	40	0.2	CM10...	
9	16	60°	ST16-C0916-60-40	16.5	16	15.6	105	40	0.8	CM10...	

1. Wrench and screw are included. Inserts are ordered separately (10/pkg).
2. 10 screws and 1 wrench are included in Insert Clamping Screw Set.
3. Centering is not possible.

Indexable Inserts


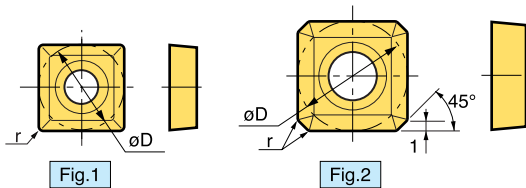


Fig.	Insert Model	ϕD	Nose Red. r	P	M	K	N
				ACP200		DS20	
1	CM0502	5.0	0.2	○	○	○	○
2	CM10C1	10.0	C1	○	○	○	○

Anti-seizure Lubricant



5g contained

Model **BN-5**

1. Inserts are available in packet of 10pcs. Please specify model number and grade. (ie: CM0502-ACP200)
2. It is recommended to regularly replace clamping screws and wrench to ensure the correct clamping force is maintained.

Recommended cutting condition

Work Material	Insert Model	Insert Grade	Plunge Cutting	
			V _c (m/min)	f (mm/rev)
General steel Alloy steel	CM05	ACP200	100 - 250	0.08 - 0.18
	CM10			0.08 - 0.20
Prehardened steel (Less than HRC40)	CM05	ACP200	60 - 150	0.08 - 0.15
	CM10			0.08 - 0.18
Stainless steel	CM05	ACP200	60 - 120	0.06 - 0.10
	CM10			0.08 - 0.15
Cast iron	CM05	ACP200	80 - 200	0.08 - 0.18
	CM10			0.08 - 0.25
Aluminum	CM05	DS20	100 - 1,000	0.08 - 0.25
	CM10			0.08 - 0.35



1. The table is just a reference to determine cutting conditions. It should be adjusted according to the condition of the machine tool and workpiece.
2. Wet cutting is recommended to obtain the good surface quality.
3. In case built-up edge occurs cutting aluminum and stainless steel, use soluble oil.
4. Standard length type (w/o ● models) are recommended for stainless and pre-hardened steel.

Chamfer cutter **C-CUTTER**



One C-Cutter to cover a wide chamfering range.

$\varnothing 5 - \varnothing 25$
 $\varnothing 10 - \varnothing 40$
 $\varnothing 30 - \varnothing 60$
 $\varnothing 50 - \varnothing 100$

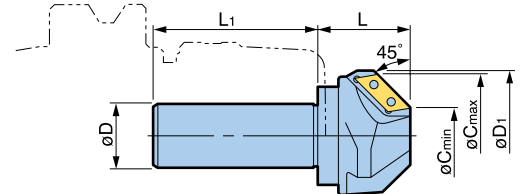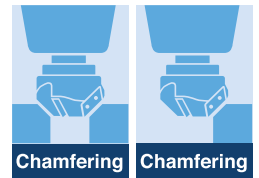


Chamfer		Model	øD	øD1	L	L1	No. of Insert	Insert Model	Screw Set	Wrench
øCmin.	øCmax.									
5.0	25.0	ST20-C0525	20	33	25	48	1	CW12	S2S-B	FLR-13S
10.0	40.0	ST25-C1040	25	45	35	58	2	CW19	S3S	FLR-20S
30.0	60.0	ST32-C3060	32	65	45	80	3			
50.0	100.0	ST42-C50100	42	106	70	80	3	CW31	S5S	FLR-28S

1. Inserts are ordered separately. An Insert Clamping key and Screws are included.
2. 10pcs. of screws and 1pce. of wrench are included in Screw Set.

C-Cutter with **coolant through holes** is available. Please add "C" after each model number when ordering.
Example : **ST20-C0525C**

■ Exclusive indexable

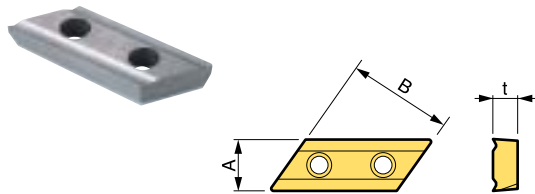

A=Non-coated **AZX**=TiCN+TiAlN multilayer coating

Insert Model	A	B	t	P30	P20
				A	AZX
CW1206	6.35	12.7	2.7	○	○
CW1909	9.525	19.05	4.5	○	○
CW3115	15.875	31.75	7.0	○	○

1. Insert is available form 1 pce.
2. Insert set is available in packs of 10 pcs. Please add "S" before each model number when ordering.
Example:**SCW1206A**

Recommended cutting condition

Work Material	Cutter Type	Max. Chamfer	Insert Grade	Side Cutting		Plunge Cutting	
				Vc (m/min)	f (mm/rev)	Vc (m/min)	f (mm/rev)
General steel Alloy steel	C0525	C2	AZX	80	0.15	50	0.1
	C1040	C3		120	0.3	90	0.15
	C3060 C50100	C4		150	0.45	150	0.45
	Stainless steel	C0525		C1.5	60	0.1	30
C1040		C2	60	0.2	40	0.12	
C3060 C50100		C3	60	0.3	60	0.3	
Cast iron	C0525	C2	AZX	50	0.15	40	0.1
	C1040	C3		90	0.2	60	0.15
	C3060 C50100	C4		120	0.6	120	0.5
Aluminum	C0525	C2.5	A	100	0.15	80	0.1
	C1040	C4		160	0.3	100	0.2
	C3060 C50100	C5		200	0.6	220	0.6

Vc: Cutting speed (m/min.) f: Feed per revolution (mm/rev.)

1. Cutting condition is the same for both non-coated and coated inserts.
Coated inserts will achieve better surface finish and extended insert life.
2. Reduce cutting speed if a larger chamfer than the max. amount shown in the table is required.

3. Peck feed is necessary in case cutting chips are too long.
4. A High rigidity toolholder is recommended, such as BIG HMC or MEGA-D Chuck.

Center and Chamfer in one **CENTER BOY**



Accurate centering and chamfering can be obtained in a single operation.

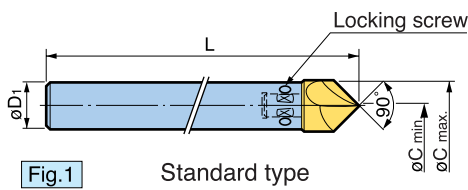
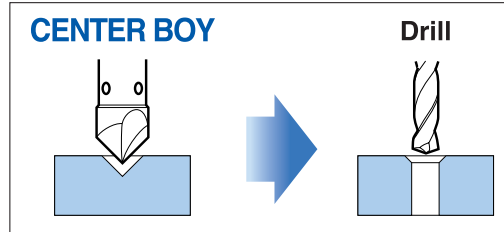


Fig.1

Standard type

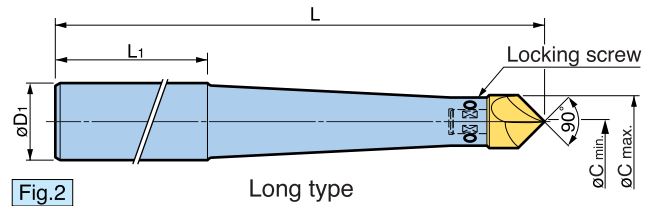


Fig.2

Long type

● in the table indicates Long Type

Chamfer		Model	Fig.	ϕD_1	L	L ₁	Insert Model	Spare Locking Screw
ϕC_{min}	ϕC_{max}							
0.9	10	ST10-CBY09010	1	10	150	-	CBY09010	H0403-5P
0.9	13	ST12-CBY09013		12				
1.0	16	ST16-CBY09016		16				
1.5	22	ST20-CBY09022		20				
0.9	13	ST20-CBY09013-220 ●	2	20	220	120	CBY09013	H0403-5P
		-260 ●		260				
1.5	22	ST32-CBY09022-260 ●		32	260		300	CBY09022
		-300 ●	300					

1. 2 pcs of Inserts are included as standard accessories.

2. 2 pcs. of Locking Screws are included. Spare Locking Screws are available in a packet of 5 pcs.

⚠ Hand feed is not recommended.

Insert



Model	CENTER BOY
CBY09010	ST10-CBY09010
CBY09013	ST12-CBY09013 / ST20-CBY09013
CBY09016	ST16-CBY09016
CBY09022	ST20-CBY09022 / ST32-CBY09022

1. Inserts are available in packages of 5 pcs.

2. Insert Grade is HSS with TiN coating.



Highly accurate
Replaceable Insert

Recommended cutting condition

Work Material	Cutter Type	Chamfering		Centering	
		Vc (m/min)	f (mm/rev)	Vc (m/min)	f (mm/rev)
General steel Alloy steel	Standard	20-35	0.10	25-50	0.08
	long	20-35	0.08	20-50	0.08
Stainless steel	Standard	15-30	0.08	20-40	0.08
	long	15-30	0.06	15-30	0.06
Cast iron	Standard	20-40	0.12	30-45	0.10
	long	20-40	0.10	30-45	0.10
Aluminum	Standard	45-60	0.15	50-65	0.15
	long	40-60	0.12	40-60	0.12

Vc: Cutting speed (m/min.) f: Feed per revolution (mm/rev.)

1. The table is just a reference to determine cutting conditions.

It should be adjusted according to the condition of the machine tool and workpiece.

2. In case vibration occurs, reduce cutting speed V.

3. Tool extension should be as short as possible.